


VENTILATION EQUIPMENT

Air Circulators (Pedestal & Wall Mount)

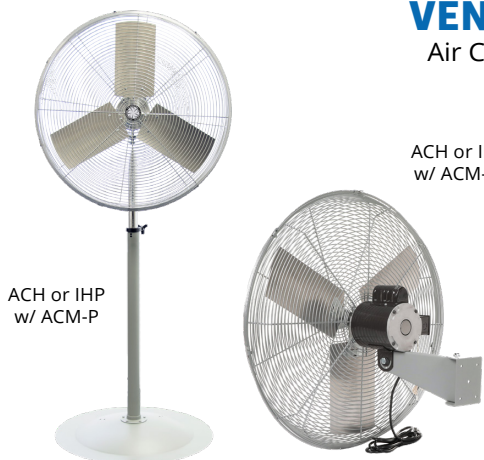

Industrial Grade

- 120-Volt electrical operation
- Non-oscillating fan heads, gray powder coated finish
- Totally enclosed (TEC), air-over ball bearing motor
- Pull chain with 2-speed operation
- 12' long, 3-conductor SJT cord with molded plug
- Coated spiral wire guards
- Aluminum 3-paddle blade, with steel spider hub
- Ideal for harsh environments (factories, machine shops, etc.)
- Fan heads shipped fully assembled
- Mounts (Pedestal, I-Beam, and Wall - sold separately)
- ETL C/US listed and made in the U.S.A.

TPI Model Number	Series	Type	Motor HP	Blade Size	CFM Max	Amps	Finish
ACH-24	Industrial - ACH	Fan Head, 24" ¼ HP	¼	24"	6,000	2.5	Gray
ACH-30	Industrial - ACH	Fan Head, 30" ¼ HP	¼	30"	7,200	2.7	Gray
IHP-24H	Industrial - IHP	Fan Head, 24" ½ HP	½	24"	6,500	2.8	Gray
IHP-30H	Industrial - IHP	Fan Head, 30" ½ HP	½	30"	7,700	3.0	Gray

NOTE: All industrial fan heads shown above do not include mounts.

Industrial Fan Head Mounts (ACH/IHP Series / gray finish)

TPI Model Number	Mount Type	Weight (lbs.)
ACM-P	Pedestal	34
ACM-W	Wall	3

Pedestal Mount
(ACM-P)



Wall Mount
(ACM-W)

Industrial Yoke Mount - High Velocity Blowers

- 120V electrical operation - hard wired
- Heavy-duty yoke mounting bracket design with 2" square steel tubing frame
- Aluminum 3-paddle blade system with steel hub and cast aluminum spider connections
- TEAO motor, with automatic thermal protection & ball bearing design for harsh environments
- Front & rear spiral wound grills are OSHA approved & have a black powder coated finish
- Supplied mounting bracket allows for 120° pivot, providing (9) adjustment settings at 15° variations
- Fan ships fully assembled & made in U.S.A.
- ETL listed & meets OSHA standards



TPI Model Number	Motor Type	Motor HP	Blade Size	Housing Size	CFM (Max)	Amps
HV18-120V	Direct Drive	⅓	16"	18"	5,000	3.4
HV24-120V	Direct Drive	½	22"	24"	8,500	3.8
HV30-120V	Direct Drive	½	28"	30"	14,250	7.6

Meets OSHA standards / 2-year limited warranty

Industrial Portable Blowers (Direct Drive)

- 120-Volt electrical operation
- Totally enclosed, air-over ball bearing motor
- Rocker switch with 1-speed operation, (PB36-D has 2 speed)
- 12' long, 3-conductor SJT cord with molded plug
- Corrosion and dent proof, high density polyethylene housing, black textured finish
- Spiral wire front & rear guards and handle included
- Aluminum 3-paddle blade on all PBX-D models; 4-paddle for PBX-B models
- 8" rubber wheels on all models (10" on PB42-B)
- Ideal for harsh environments (factories, machine shops, etc.)
- Made in the USA



TPI Model Number	Motor Type	Motor HP	Blade Size	CFM (Max)	Amps
PBX 36-D	Direct Drive	1/3	36"	11,500	5.5
PBX 42-D	Direct Drive	1/2	42"	15,000	6.0
PBX 36-B	Belt Drive	3/4	36"	17,500	11.0
PBX 42-B	Belt Drive	1	42"	23,500	15.0

Meets OSHA standards / 1-year limited warranty



PBX-D
Direct Drive



PBX-B
Belt Drive

Industrial Floor & Workstation Fans

- Totally enclosed, air-over sleeve bearing, 120V motor
- Rocker switch with 3-speed operation, (Pull chain on U-TE models)
- 10' long, 3-conductor SJT cord with molded plug
- Chrome plated spiral wire guards and handle included
- Aluminum 3-paddle blade design
- Ideal for harsh environments (factories, machine shops, etc.)
- F-TE's & U-TE's are shipped fully assembled

TPI Model Number	Motor Type	Motor HP	Blade Size	CFM (Max)	Amps
F-12-TE	Floor Fan	1/2	12"	1400	1.1
F-18-TE	Floor Fan	1/8	18"	2900	2.2
U-12-TE	Workstation Fan	1/2	12"	1400	1.1
U-18-TE	Workstation Fan	1/8	18"	2900	2.2

Meets OSHA standards / 1-year limited warranty



Yoke Mount /
Workstation Model



Floor Model