



2024 COMMERCIAL FAN FLYER

Contact your Martin Sales Rep or call 800.828.8116.

PORTABLE BLOWERS - BELT DRIVE

MOTOR: 2-speed, 120V, open ventilated, ball-bearing and permanently lubricated
BLADE: Aluminum, 4-paddle
SWITCH: Rocker
CORD: 8' long, SJT type 3 conductor
GUARD: Spiral wire (front & rear) OSHA approved
WHEELS: 8" rubber
HOUSING: 20-gauge steel powder coated, black finish



MODEL NUMBER	SIZE	MOTOR HP	CFM MAX VELOCITY	MAX AMPS	WT. (LBS)	PRICE
CPB 36-B	36"	1/3	8,600	4.20	82	\$767.00
CPB 42-B	42"	1/2	12,000	5.56	93	\$916.00

Meets Federal OSHA Requirements / 1 Year LIMITED WARRANTY



CPB 42-B

PORTABLE BLOWERS - DIRECT DRIVE

MOTOR: 2-speed, 120V, open ventilated, ball-bearing and permanently lubricated, 3.6 Amp max
BLADE: Aluminum, 3-paddle; steel for 36" unit
SWITCH: Rocker or Rotary
CORD: 6' long, SJT type 3 conductor; 10' on 36" model
GUARD: Spiral wire (front & rear) OSHA approved
WHEELS: Rubber, diameter varies
HOUSING: 20-gauge steel powder coated, black finish



CPBS 30-D SWIVEL MODEL



CPB 36-D STATIONARY MODEL

MODEL NUMBER	SIZE	STAND TYPE	CFM MAX VELOCITY	HP	SWITCH	MAX AMPS	WT. (LBS)	PRICE
CPBS 24-DHV	24"	SWIVEL	5,400	1/6	ROTARY	2.35	38	\$288.00
CPBS 30-D	30"	SWIVEL	6,700	1/5	ROCKER	2.73	60	\$505.00
CPB 30-D	30"	STATIONARY	6,700	1/5	ROCKER	2.73	52	\$469.00
CPB 36-D	36"	STATIONARY	8,500	1/3	ROTARY	3.97	70	\$613.00

Meets Federal OSHA Requirements / 1 Year LIMITED WARRANTY

FLOOR FANS



MOTOR: 1/5 HP, 3 speed, sleeve-bearing, open ventilated, permanently lubricated
SWITCH: Rotary
FINISH: Steel, all black semi-gloss powder coated finish
CORD: 7' long, SJT type 3 conductor
GUARD: Coated steel with retaining clips

MODEL NUMBER	CFM			MAX AMPS	WT. (LBS)	PRICE
	HIGH	MEDIUM	LOW			
CF-12	1,050	875	750	0.48	10	\$114.00
CF-18	1,600	1,480	1,380	1.15	16	\$141.00
CF-20	1,725	1,600	1,480	1.21	18	\$195.00

Meets Federal OSHA Requirements / 1 Year LIMITED WARRANTY



AIR CIRCULATORS - WALL MOUNT

Oscillating & Non-Oscillating Fan Heads


- MOTOR: 3-speed, 120V, single phase, ball bearing motor open ventilated and permanently lubricated
- SWITCH: Pull chain
- BLADE: Aluminum, 3-paddle with steel hub/spider assembly
- CORD: 9' long cord SJT type 3-conductor with grounded plug
- GUARD: OSHA approved, coated steel with retaining clips for easy access cleaning and maintenance
- MOUNT: Steel bracket extends fan head 9" from a vertical surface
- FINISH: Steel, all black, semi-gloss powder coated finish



WALL MOUNT

ALL FAN COMPONENTS SHIPPED IN ONE UPS-ABLE CARTON

MODEL NUMBER	BLADE SIZE	FAN TYPE	HP	CFM MAX VELOCITY	AMPS (HIGH)	PRICE
CACU 20-W	20"	Non-Oscillating	1/12	5,400	1.38	\$301.00
CACU 24-W	24"	Non-Oscillating	1/8	6,700	1.75	\$421.00
CACU 30-W	30"	Non-Oscillating	1/6	5,400	1.93	\$434.00
CACU 24-WO	24"	Oscillating	1/8	6,700	1.75	\$497.00
CACU 30-WO	30"	Oscillating	1/6	5,400	1.93	\$539.00

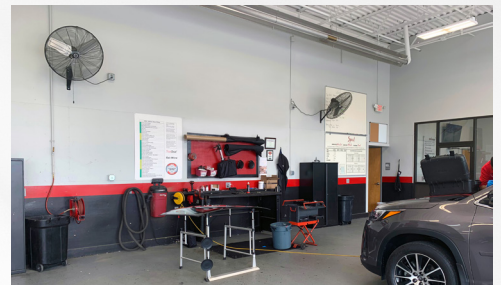

AIR CIRCULATORS - PEDESTAL MOUNT

- MOTOR: 3-speed, 120V, single phase, ball bearing motor open ventilated and permanently lubricated
- SWITCH: Pull chain
- BLADE: Aluminum, 3-paddle with steel hub/spider assembly
- CORD: 9' long cord SJT type 3-conductor with grounded plug
- GUARD: OSHA approved, coated steel with retaining clips for easy access cleaning and maintenance
- MOUNT: Adjusts center of fan from 43" to 60"
- FINISH: Steel, all black, semi-gloss powder coated finish



PEDESTAL MOUNT



ALL FAN COMPONENTS SHIPPED IN ONE UPS-ABLE CARTON

MODEL NUMBER	BLADE SIZE	FAN TYPE	HP	CFM MAX VELOCITY	AMPS (HIGH)	PRICE
CACU 20-P	20"	Non-Oscillating	1/12	6,700	1.38	\$335.00
CACU 24-P	24"	Non-Oscillating	1/8	5,400	1.75	\$493.00
CACU 30-P	30"	Non-Oscillating	1/6	6,700	1.93	\$542.00
CACU 30-P-HD	30"	Non-Oscillating	1/3	7,000	3.60	\$635.00
CACU 24-PO	24"	Oscillating	1/8	5,400	1.75	\$580.00
CACU 30-PO	30"	Oscillating	1/6	6,700	1.93	\$609.00
CACU 30-PO-HD	30"	Oscillating	1/4	7,000	3.60	\$780.00

Meets federal OSHA requirements & 1-year warranty

