

DUNLOP

THE WORLD'S INNOVATION LEADING BRAND FOR PROTECTIVE SAFETY FOOTWEAR


Learn More <u>About</u> Purofort®



Safety comes first in the food processing industry. Work activities in the sector involve specific risks. For example, there is a high risk of slipping and falling due to wet floors. There is also a risk of cross-contamination. In addition, coming into direct contact with industrial cleaning agents used in the cleaning process could have harmful effects.

The Dunlop FoodPro is our best in class solution, our range comes in multiple colors and are SRC slip resistant.



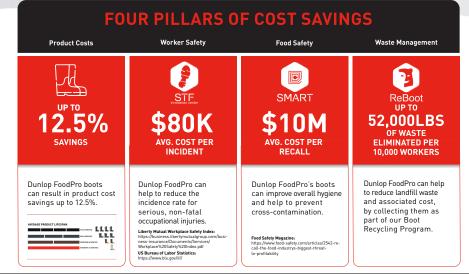

REDUCE YOUR TOTAL COST OF OWNERSHIP

in food processing facilities.

Dunlop's superior quality products will not only allow you to work safer, smarter and more sustainable, it will also help you to reduce your total cost of ownership in 4 distinct ways.

throughout the day.







BEST

DUNLOP[®] PUROFORT[®] FOODPRO MULTIGRIP SAFETY

PUROFORT

Size range:03 - 16Part NumbersPart NumbersPart Numbers(semi) solid contaminated areasSize range:03 - 16DunlopDunlopDunlop✓ Anatomically shaped footbed with insole for all day foot supportFor NumbersEA51631-03EA51831-03CA61131-04✓ Lightweight Purofort provides thermoregulation for comfort from 104 *F to -4 *FFor Size range:03 - 16DunlopEA51631-03EA51831-05CA61131-04✓ Highest SRC+ rated slip resistant outsole for multiple types of flooring and contaminationFor Size range:03 - 16Part NumbersDunlopEA51631-03EA51831-05CA61131-06✓ Highest SRC+ rated slip resistant outsole for multiple types of flooring and contaminationFor Size range:03 - 16Part NumbersPart NumbersPart Numbers✓ Highest SRC+ rated slip resistant outsole for multiple types of flooring and contaminationFor Size range:03 - 16EA51631-11EA51631-12CA61131-166123155.16For Size range:03 - 16EA51631-13EA51831-14CA61131-146123155.15For Size range:For Size range:For Size range:For Size range:For Size range:For Size range:✓ Highest SRC+ rated slip resistant outsole for multiple types of flooring and contaminationFor Size range:For		YELLOW	BLUE	GREEN	WHITE
Standard:ASIM F2413-18 MI/C SD 100DunlopDunlopStandard:ASIM F2413-18 MI/C SD 100EA51631-03EA51831-03CA61131-04Anatomically shaped footbed with insole for all day foot supportPart NumbersEA51631-04EA51831-05CA61131-06Lightweight Purofort provides thermoregulation for comfort from 104 *F to -4 *F6123155.06EA51631-06EA51831-08CA61131-10Highest SRC+ rated slip resistant outsole for multiple types of flooring and contaminationImage for the table for all contaminationEA51631-11EA51631-14EA51831-14CA61131-16ContaminationImage for table for all contaminationImage for table for flooring and contaminationEA51631-16EA51631-16EA51831-08CA61131-10ContaminationImage for table for slip resistant outsole for multiple types of flooring and contaminationImage for table for flooring and contaminationEA51631-16EA51631-16EA51831-16CA61131-16EA51631-16EA51631-16EA51631-16EA51831-16EA51831-16EA51831-16EA51831-16		Size range: 03 - 16	Part Numbers	Part Numbers	Part Numbers
Part Numbers EA51631-04 EA51831-04 CA61131-05 ✓ Anatomically shaped footbed with insole for all day foot support 6123155.03 EA51631-05 EA51831-06 CA61131-06 ✓ Lightweight Purofort provides thermoregulation for comfort from 104 *F to -4 *F 6123155.09 EA51631-10 EA51631-10 EA51831-10 CA61131-12 ✓ Highest SRC+ rated slip resistant outsole for multiple types of flooring and contamination Guize 512 EA51631-14 EA51631-14 EA51831-16 CA61131-16 6123155.14 EA51631-16 EA51631-16 EA51831-16 CA61131-16 EA51831-16 CA61131-12			Dunlop	Dunlop	Dunlop
Anatomically shaped Dunlop EA51631-04 CA61131-06 footbed with insole for all day foot support 6123155.03 EA51631-05 EA51831-06 CA61131-06 ✓ Lightweight Purofort provides thermoregulation for comfort from 104 *F to -4 *F 6123155.06 EA51631-07 EA51831-09 CA61131-09 ✓ Highest SRC+ rated slip resistant outsole for multiple types of flooring and contamination 6123155.12 EA51631-14 EA51831-15 CA61131-16	(semi) solid contaminated areas		EA51631-03	EA51831-03	
footbed with insole for all day foot support 6123155.03 EA51631-06 EA51831-06 CA61131-07 all day foot support 6123155.04 EA51631-07 EA51831-06 CA61131-07 ✓ Lightweight Purofort provides thermoregulation for comfort from 104 *F to -4 *F 6123155.07 EA51631-08 EA51831-09 CA61131-10 ✓ Highest SRC+ rated slip resistant outsole for multiple types of flooring and contamination 6123155.12 EA51631-14 EA51831-14 CA61131-15 6123155.15 6123155.15 EA51631-16 EA51831-16 EA51831-16 EA51831-16		Part Numbers	EA51631-04	EA51831-04	CA61131-05
all day foot support 6123155.04 EA51631-07 EA51831-07 CA61131-08 ✓ Lightweight Purofort provides thermoregulation for comfort from 104 *F to -4 *F 6123155.06 EA51631-09 EA51831-10 CA61131-10 ✓ Highest SRC+ rated slip resistant outsole for multiple types of flooring and contamination 6123155.12 EA51631-14 EA51831-14 CA61131-15 6123155.13 EA51631-16 EA51831-16 EA51831-16 EA51831-16	 Anatomically shaped 	Dunlop	EA51631-05	EA51831-05	CA61131-06
An day root dappent 6123155.05 EA51631-07 EA51631-08 CA61131-08 ✓ Lightweight Purofort provides thermoregulation for comfort from 104 × F to -4 × F 6123155.07 EA51631-10 EA51831-10 CA61131-11 ✓ Highest SRC+ rated slip resistant outsole for multiple types of flooring and contamination 6123155.13 EA51631-16 EA51631-15 CA61131-16	footbed with insole for	6123155.03	EA51631-06	EA51831-06	CA61131-07
 Lightweight Purofort provides thermoregulation for comfort from 104 *F to -4 *F Highest SRC+ rated slip resistant outsole for multiple types of flooring and contamination 6123155.13 EA51631-08 EA51631-09 EA51831-09 CA61131-10 CA61131-11 CA61131-12 CA61131-12 CA61131-12 CA61131-13 CA61131-14 CA61131-14 CA61131-15 CA61131-16 EA51631-16 EA51631-16 EA51631-16 	all day foot support	6123155.04	EA51631-07	EA51831-07	CA61131-08
Lightweight Purofort 6123155.06 EA51631-09 EA51831-09 CA61131-10 provides thermoregulation 6123155.07 EA51631-10 EA51831-10 CA61131-11 for comfort from 6123155.08 EA51631-11 EA51831-11 CA61131-12 104 *F to -4 *F 6123155.10 EA51631-12 EA51831-12 CA61131-13 6123155.10 EA51631-13 EA51831-14 CA61131-14 6123155.11 EA51631-14 EA51831-14 CA61131-15 slip resistant outsole for multiple types of flooring and contamination 6123155.13 EA51631-16 EA51631-16 6123155.15 EA51631-16 EA51831-16 EA51831-16		6123155.05	EA51631-08	EA51831-08	
provides thermoregulation 6123155.07 EA51631-10 EA51831-10 CA61131-11 for comfort from 6123155.08 EA51631-11 EA51831-11 CA61131-12 104 *F to -4 *F 6123155.09 EA51631-12 EA51831-12 CA61131-13 ✓ Highest SRC+ rated slip resistant outsole for multiple types of flooring and contamination 6123155.13 EA51631-15 EA51831-16 CA61131-16	✓ Lightweight Purofort	6123155.06	EA51631-09	EA51831-09	
for comfort from 104 *F to -4 *F 6123155.08 EA51631-11 EA51831-11 CA61131-12 ✓ Highest SRC+ rated slip resistant outsole for multiple types of flooring and contamination 6123155.12 EA51631-13 EA51831-14 CA61131-13 6123155.13 EA51631-14 EA51831-14 CA61131-15 6123155.14 6123155.14 EA51631-16 EA51831-16	provides thermoregulation	6123155.07	EA51631-10	EA51831-10	CA61131-11
104 *F to -4 *F 6123155.09 EA51631-12 EA51831-12 CA61131-13 Highest SRC+ rated slip resistant outsole for multiple types of flooring and contamination 6123155.12 EA51631-15 EA51831-15 CA61131-16 6123155.14 6123155.15 6123155.15 EA51631-16 EA51831-16 CA61131-16	for comfort from	6123155.08	EA51631-11	EA51831-11	
 Highest SRC+ rated slip resistant outsole for multiple types of flooring and contamination Highest SRC+ rated for the flooring and contamination Highest SRC+ rated for the flooring and contamination Highest SRC+ rated for the flooring flooring and contamination Highest SRC+ rated for the flooring flooring flooring and contamination Highest SRC+ rated flooring floori	104 *F to -4 *F	6123155.09	EA51631-12	EA51831-12	
 Highest SRC+ rated slip resistant outsole for multiple types of flooring and contamination 6123155.11 6123155.12 6123155.12 6123155.13 6123155.14 6123155.14 6123155.15 CA61131-15 CA61131-16 CA61131-1		6123155.10	EA51631-13	EA51831-13	
slip resistant outsole for multiple types of flooring and contamination 6123155.12 EA51631-15 EA51831-15 CA61131-16 6123155.13 EA51631-16 EA51831-16 EA51831-16 EA51831-16	✓ Highest SRC+ rated	6123155.11	EA51631-14	EA51831-14	
multiple types of flooring and contamination 6123155.13 EA51631-16 EA51831-16 6123155.14 6123155.15	slip resistant outsole for	6123155.12	EA51631-15	EA51831-15	
and contamination 6123155.14 6123155.15	multiple types of flooring	6123155.13		EA51831-16	
6123155.15	and contamination	6123155.14		ET N	27
6123155.16		6123155.15			
		6123155.16	Ste T	Stell -	And and a second
					-

BETTER



DUNLOP® DURAPRO® STEEL TOE

Protection and comfort is reinvented with the DuraPro

- Provides moderate chemical resistance
- Next generation safety-loc designed for superior traction with canals for easy decontamination
- ✓ Steel toe complies with ASTM F2413-18 with steel shank
- ✓ Best in class Durapro TPU insole for all day comfort

Size range:	03 - 16
Standard:	ASTM F2413-18 EH
Part Numbers	
Dunlop	
89086.03	
89086.04	
89086.05	
89086.06	
89086.07	
89086.08	
89086.09	
89086.10	
89086.11	
89086.12	
89086.13	
89086.14	
89086.15	
89086.16	



DUNLOP[®] CHESAPEAKE SAFETY 14" STEEL TOE

Light and Mighty

- Energy absorbing BAY-LOC outsole with channels to repel water
- Lightweight modern design 25% lighter than classic PVC boots
- 100% waterproof

Size range:	03 - 15	
Standard:	ASTM F2413-18	
Part Numbers		
Dunlop		
6776.03		
86776.04		
36776.05		
6776.06		
36776.07		
86776.08		
6776.09		
86776.10		
86776.11		
6776.12		
86776.13		
86776.14		
36776.15		

