

© Copyright 2024 Contact your Martin Sales Rep or call 800.828.8116. [martinsupply.com](http://martinsupply.com)

**PORTABLE BLOWERS - BELT DRIVE**

MOTOR: 2-speed, 120V, open ventilated, ball-bearing and permanently lubricated  
 BLADE: Aluminum, 4-paddle  
 SWITCH: Rocker  
 CORD: 8' long, SJT type 3 conductor  
 GUARD: Spiral wire (front & rear) OSHA approved  
 WHEELS: 8" rubber  
 HOUSING: 20-gauge steel powder coated, black finish



MODEL NUMBER	SIZE	MOTOR HP	CFM MAX VELOCITY	MAX AMPS	WT. (LBS)	2024 MAP
CPB 36-B	36"	1/3	8,600	4.20	82	\$590.08
CPB 42-B	42"	1/2	12,000	5.56	93	\$705.28

Meets Federal OSHA Requirements / 1 Year LIMITED WARRANTY



CPB 42-B

**PORTABLE BLOWERS - DIRECT DRIVE**

MOTOR: 2-speed, 120V, open ventilated, ball-bearing and permanently lubricated, 3.6 Amp max  
 BLADE: Aluminum, 3-paddle; steel for 36" unit  
 SWITCH: Rocker or Rotary  
 CORD: 6' long, SJT type 3 conductor; 10' on 36" model  
 GUARD: Spiral wire (front & rear) OSHA approved  
 WHEELS: Rubber, diameter varies  
 HOUSING: 20-gauge steel powder coated, black finish



CPBS 30-D SWIVEL MODEL



CPB 36-D STATIONARY MODEL

MODEL NUMBER	SIZE	STAND TYPE	CFM MAX VELOCITY	HP	SWITCH	MAX AMPS	WT. (LBS)	2024 MAP
CPBS 24-DHV	24"	SWIVEL	5,400	1/6	ROTARY	2.35	38	\$221.44
CPBS 30-D	30"	SWIVEL	6,700	1/5	ROCKER	2.73	60	\$389.12
CPB 30-D	30"	STATIONARY	6,700	1/5	ROCKER	2.73	52	\$360.96
CPB 36-D	36"	STATIONARY	8,500	1/3	ROTARY	3.97	70	\$471.68

Meets Federal OSHA Requirements / 1 Year LIMITED WARRANTY

**FLOOR FANS**



MOTOR: 1/5 HP, 3 speed, sleeve-bearing, open ventilated, permanently lubricated  
 SWITCH: Rotary  
 FINISH: Steel, all black semi-gloss powder coated finish  
 CORD: 7' long, SJT type 3 conductor  
 GUARD: Coated steel with retaining clips

MODEL NUMBER	CFM			MAX AMPS	WT. (LBS)	2024 MAP
	HIGH	MEDIUM	LOW			
CF-12	1,050	875	750	0.48	10	\$87.68
CF-18	1,600	1,480	1,380	1.15	16	\$108.80
CF-20	1,725	1,600	1,480	1.21	18	\$149.76

Meets Federal OSHA Requirements / 1 Year LIMITED WARRANTY



# AIR CIRCULATORS - WALL MOUNT

Oscillating & Non-Oscillating Fan Heads


- MOTOR: 3-speed, 120V, single phase, ball bearing motor open ventilated and permanently lubricated
- SWITCH: Pull chain
- BLADE: Aluminum, 3-paddle with steel hub/spider assembly
- CORD: 9' long cord SJT type 3-conductor with grounded plug
- GUARD: OSHA approved, coated steel with retaining clips for easy access cleaning and maintenance
- MOUNT: Steel bracket extends fan head 9" from a vertical surface
- FINISH: Steel, all black, semi-gloss powder coated finish



WALL MOUNT

## ALL FAN COMPONENTS SHIPPED IN ONE UPS-ABLE CARTON

MODEL NUMBER	BLADE SIZE	FAN TYPE	HP	CFM MAX VELOCITY	AMPS (HIGH)	2024 MAP
CACU 20-W	20"	Non-Oscillating	1/12	5,400	1.38	\$231.28
CACU 24-W	24"	Non-Oscillating	1/8	6,700	1.75	\$323.84
CACU 30-W	30"	Non-Oscillating	1/6	5,400	1.93	\$334.08
CACU 24-WO	24"	Oscillating	1/8	6,700	1.75	\$382.08
CACU 30-WO	30"	Oscillating	1/6	5,400	1.93	\$414.72

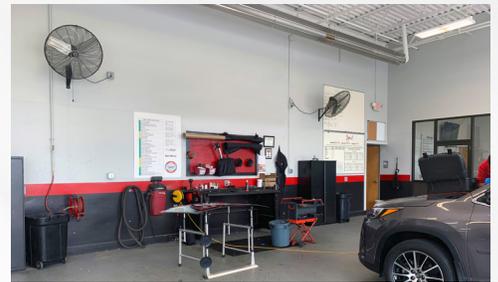

# AIR CIRCULATORS - PEDESTAL MOUNT

- MOTOR: 3-speed, 120V, single phase, ball bearing motor open ventilated and permanently lubricated
- SWITCH: Pull chain
- BLADE: Aluminum, 3-paddle with steel hub/spider assembly
- CORD: 9' long cord SJT type 3-conductor with grounded plug
- GUARD: OSHA approved, coated steel with retaining clips for easy access cleaning and maintenance
- MOUNT: Adjusts center of fan from 43" to 60"
- FINISH: Steel, all black, semi-gloss powder coated finish



PEDESTAL MOUNT



## ALL FAN COMPONENTS SHIPPED IN ONE UPS-ABLE CARTON

MODEL NUMBER	BLADE SIZE	FAN TYPE	HP	CFM MAX VELOCITY	AMPS (HIGH)	2024 MAP
CACU 20-P	20"	Non-Oscillating	1/12	6,700	1.38	\$257.28
CACU 24-P	24"	Non-Oscillating	1/8	5,400	1.75	\$378.88
CACU 30-P	30"	Non-Oscillating	1/6	6,700	1.93	\$416.64
CACU 30-P-HD	30"	Non-Oscillating	1/3	7,000	3.60	\$485.76
CACU 24-PO	24"	Oscillating	1/8	5,400	1.75	\$446.08
CACU 30-PO	30"	Oscillating	1/6	6,700	1.93	\$468.48
CACU 30-PO-HD	30"	Oscillating	1/4	7,000	3.60	\$600.32

Meets federal OSHA requirements & 1-year warranty

