



## Specifications & Strength Ratings

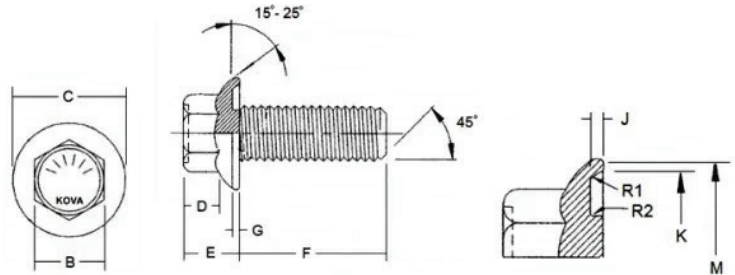

Size	B		C		D		E		F		G		J		K		M
	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	
5/16-18 x 3/4	.500	.489	.730	.210	.319	.303	.750	.720	.083	.062	.050	.040	.605	.560	.610		
5/16-18 x 1	.500	.489	.730	.210	.319	.303	1.00	.970	.083	.062	.050	.040	.605	.560	.610		
5/16-18 x 1-1/4	.500	.489	.730	.210	.319	.303	1.25	1.21	.083	.062	.050	.040	.605	.560	.610		
5/16-18 x 1-1/2	.500	.489	.730	.210	.319	.303	1.50	1.46	.083	.062	.050	.040	.605	.560	.610		
3/8-16 x 1	.500	.550	.807	.256	.380	.365	1.00	.970	.095	.071	.050	.040	.675	.655	.709		
3/8-16 x 1-1/4	.500	.550	.807	.256	.380	.365	1.25	1.21	.095	.071	.050	.040	.675	.655	.709		
3/8-16 x 1-1/2	.500	.550	.807	.256	.380	.365	1.50	1.46	.095	.071	.050	.040	.675	.655	.709		
7/16-14 x 1	.500	.612	.950	.300	.440	.410	1.00	.970	.099	.075	.050	.040	.805	.768	.866		
7/16-14 x 1-1/2	.500	.612	.950	.300	.440	.410	1.50	1.44	.099	.075	.050	.040	.805	.768	.866		
5/16-18 x 2	.500	.612	.950	.300	.440	.410	2.00	1.94	.099	.075	.050	.040	.805	.768	.866		

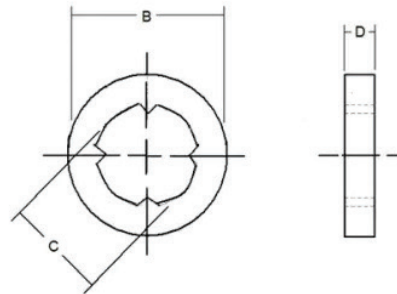

Size	B		C		D	
	Max	Min	Max	Min	Max	Min
5/16	.567	.551	Ref 0.350	.115	.090	
3/8	.646	.630	.420	.400	.120	.105
7/16	.736	.720	.510	.490	.130	.120

